

- A 'Plug together' modular system for converting an icebox or insulated cavity into a highly efficient refrigerator.
- Le système le plus efficace pour transformer une glacière ou une cuve isolée en un bon réfrigérateur.
- El sistema más válido para transformar una cubitera o un hueco aislado en un frigorífico.
- Das am besten geeignete System, um aus einem Kühlraum oder einem gut isolierten Raum einen sehr guten Kühlschrank zu machen.
- Il sistema più valido per trasformare una ghiacciaia o un vano isolato in un ottimo frigorifero.

- Compressor speed
- Refrigerating capacity
- Power consumption
- Current consumption
- Refrigerator max. volume
- Freezer max. volume
- Weight - Poids - Peso

Water cooled



380 L

W 50 F
Part. N° E51970



0,75 A/h



340 L


W 35 F
Part. N° E50045X




0,41 A/h



W 35 F - W 50 F

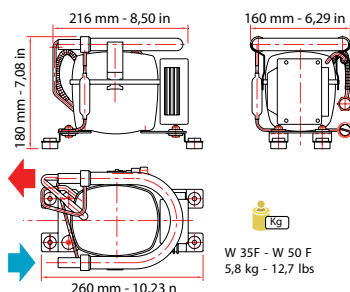

MULTIPLE INSTALLATION LAYOUT

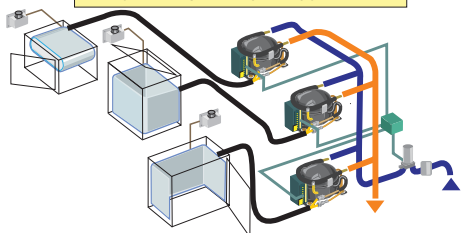

K 50 F
Part. N° E51975



0,64 A/h



K 35 F
Part. N° E50345X



0,31 A/h



K 35 F - K 50 F

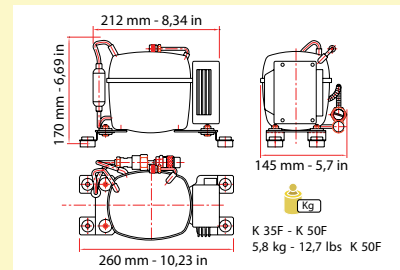


W 50 F - K 50 F
TECHNICAL CHARACTERISTICS *

RPM	2000	2500	3000	3500
Bt/h	369	472	560	650
W	45	56	66	81
A	4	4,7	5,7	6,8
Refrigerator	180	250	340	380
Freezer	N.A.	N.A.	80	100

W 35 F - K 35 F
TECHNICAL CHARACTERISTICS *

RPM	2000	2500	3000	3500
Bt/h	326	406	471	540
W	31	40	47	56
A	3	3,4	3,9	4,6
Refrigerator	150	180	250	340
Freezer	N.A.	N.A.	80	100



KEEL COOLER



340 L

Air cooled

frigoboot®

AH 35 F
Part. N° E50035X

AHL 35 F
Part. N° E52085

AV 35 F
Part. N° E50025X

CAPRI 50F
Part. N° E52120



CAPRI 50F TECHNICAL CHARACTERISTICS *



RPM	2000	2500	3000	3500
Bth/h	326	410	490	565
W	49	64	75	89
A	4,3	5,4	6,5	7,5
150	180	250	340	
N.A.	N.A.	60	80	

200 L 0,87 A/h

AH 35 F - AHL 35 F - AV 35 F
TECHNICAL CHARACTERISTICS *


RPM	2000	2500	3000	3500
Bth/h	274	311	396	454
W	37	48	56	65
A	3,2	4	4,6	5,4
150	180	250	340	
N.A.	N.A.	60	70	

100 L 0,46A/h

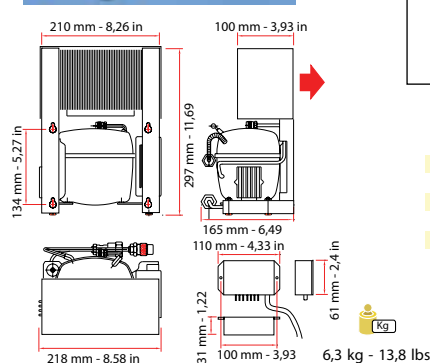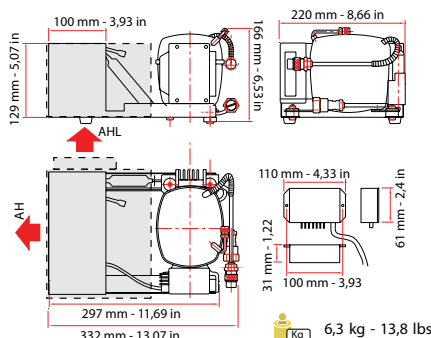


200 L


CAPRI 35 F
Part. N° E51430



ELBA 35 F
Part. N° E51435

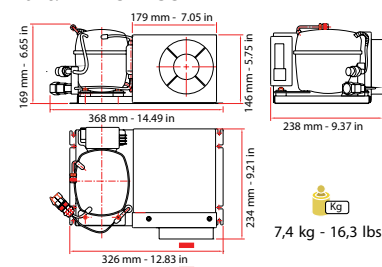

IBIZA 35 F
Part. N° E51720




CAPRI 35 F - ELBA 35 F - IBIZA 35 F
TECHNICAL CHARACTERISTICS *

RPM	2000	2500	3000	3500
Bth/h	247	280	325	373
W	37	49	57	66
A	3,2	4,1	4,7	5,5
100	130	150	200	
N.A.	N.A.	60	70	


100 L 0,46A/h

100 L


MADRID 35 F
Part. N° E51380



PARIS 35 F
Part. N° E 51135



ROMA 35 F
Part. N° E51275

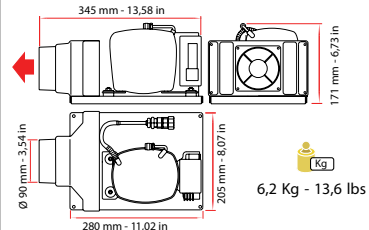

MADRID 35F - PARIS 35F - ROMA 35F
TECHNICAL CHARACTERISTICS *

RPM	2000
Bth/h	225
W	41
A	3,4
100	
N.A.	

100 L 0,59 A/h

*CONDITIONS: Air = + 32°C - Sea water = + 25°C
A/h conditions: ambient T = + 20° C; box T = + 6° C; isol. = 5 cm

VECO

VECO S.p.A. Via G. Cantore, 6/8 - 20833 Giussano (MB) Italy
tel +39 0362 35321 | fax +39 0362 852 995
e-mail: info@veco.net | web: www.veco.net

R1455 Rev. 121003