



# BD35F Direct Current Compressor (Inch Connectors), R134a, 12-24V DC, 10-45V DC Solar & 100-240V AC 50/60Hz

## Compressors

Code number (without electronic units)	101Z0204
Electronic unit 12-24V DC - standard	single: 101N0210, 30 pcs: 101N0211
Electronic unit 12-24V DC - with metal shielding	single: 101N0220, 30 pcs: 101N0221
Electronic unit 12-24V DC - with AEO	single: 101N0300, 30 pcs: 101N0301
Electronic unit 12-24V DC - with AEO & metal shielding	single: 101N0320, 30 pcs: 101N0321
Electronic unit 10-45V - for solar applications	single: 101N0400, 30 pcs: 101N0401
Electronic unit 12-24V DC & 100-240V AC 50/60Hz	single: 101N0500, 36 pcs: 101N0501
Electronic unit 12-24V - for automotive applications	single: 101N0600, 30 pcs: 101N0601
Electronic unit 12-24V - for automotive applications	single: 101N0630, 30 pcs: 101N0631
Approved compressor - electronic unit combinations	refer to <i>Technical Info</i> DEHC.EI.100.C
Additional approvals	e4, C-Tick
Compressors on pallet	150

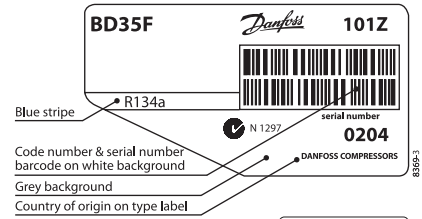

## Application

Application	LBP/MBP/HBP
Evaporating temperature	°F -20 to 50
Voltage range (DC & AC)	12-24V DC & 100-240V AC 50/60Hz 10-45V DC for solar applications
Max. condensing temperature continuous (short)	°F 140 (158)
Max. winding temperature continuous (short)	°F 257 (275)

## Cooling requirements

Application	LBP	MBP	HBP
32°C	S	S	S
38°C	S	S	S
43°C	S	S	S

Remarks on application: Fan cooling F<sub>1</sub> depending on application and speed.

## Motor

Motor type	Variable speed
Resistance, all 3 windings (25°C)	Ω 2.2

## Design

Displacement	cu.in.	0.12
Oil quantity (type)	fl.oz.	5.1 (polyolester)
Maximum refrigerant charge	oz.	10.5
Free gas volume in compressor	fl.oz.	29.6
Weight - Compressor/Electronic unit	lbs.	9.5/0.55

## Dimensions

Height	inch	A	5.39
		B	5.32
		B1	5.04
		B2	2.87
Suction connector	location/I.D. in.   angle	C	0.252-0.259   41.5°
Process connector	location/I.D. in.   angle	D	0.252-0.259   45°
Discharge connector	location/I.D. in.   angle	E	0.202-0.205   21°




## Standard battery protection settings (no connection C - P)

12V cut-out [V]	12V cut-in [V]	24V cut-out [V]	24V cut-in [V]
10.4	11.7	22.8	24.2

## Optional battery protections settings (not possible with electronic unit 101N0400)

Resistor (R2)	12V cut-out	12V cut-in	12V max.	24V cut-out	24V cut-in	24V max.
[kΩ]	[V]	[V]	Voltage [V]	[V]	[V]	Voltage [V]
0	9.6	10.9	17.0	21.3	22.7	31.5
1.6	9.7	11.0	17.0	21.5	22.9	31.5
2.4	9.9	11.1	17.0	21.8	23.2	31.5
3.6	10.0	11.3	17.0	22.0	23.4	31.5
4.7	10.1	11.4	17.0	22.3	23.7	31.5
6.2	10.2	11.5	17.0	22.5	23.9	31.5
8.2	10.4	11.7	17.0	22.8	24.2	31.5
11	10.5	11.8	17.0	23.0	24.5	31.5
14	10.6	11.9	17.0	23.3	24.7	31.5
18	10.8	12.0	17.0	23.6	25.0	31.5
24	10.9	12.2	17.0	23.8	25.2	31.5
33	11.0	12.3	17.0	24.1	25.5	31.5
47	11.1	12.4	17.0	24.3	25.7	31.5
82	11.3	12.5	17.0	24.6	26.0	31.5
220	9.6	10.9	17.0	21.3	22.7	31.5

- S = Static cooling normally sufficient
- O = Oil cooling
- F<sub>1</sub> = Fan cooling 1.5 m/s  
(compressor compartment temperature equal to ambient temperature)
- F<sub>2</sub> = Fan cooling 3.0 m/s necessary
- SG = Suction gas cooling normally sufficient
- = not applicable in this area

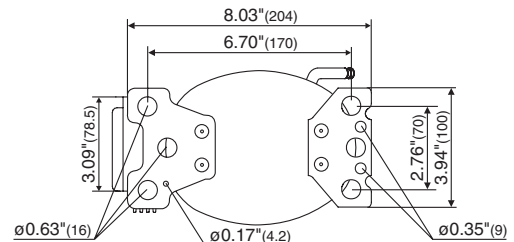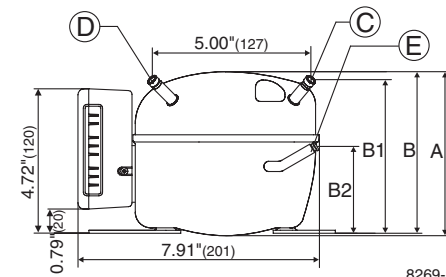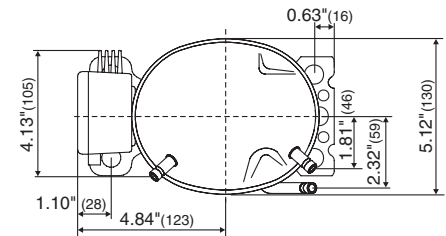

**Capacity (ASHRAE LBP)**

rpm \ °F	-20	-13	-10	0	10	14	20	30	40	41	45	50
2,000	74	101	113	159	214	238	280	361	458	471	514	575
2,500	95	127	142	199	268	298	351	452	574	586	643	
3,000	104	138	155	222	307	344	411	535	681			
3,500	119	153	171	248	349	396	473	620				

**Capacity (EN 12900 Household/CECOMAF)**

rpm \ °F	-20	-13	-10	0	10	14	20	30	40	41	45	50
2,000	17.5	23.9	26.8	37.6	50.6	56.6	66.4	85.5	109	111	122	136
2,500	22.2	29.9	33.4	46.9	63.2	70.7	83.0	107	136	139	152	
3,000	24.5	32.4	36.4	52.3	72.4	81.7	97.0	126	161			
3,500	27.9	35.9	40.3	58.5	82.5	93.6	112	147				

**Power consumption**

rpm \ °F	-20	-13	-10	0	10	14	20	30	40	41	45	50
2,000	19.1	23.5	25.3	30.8	36.1	38.3	41.3	46.6	52.5	53.4	55.7	59.1
2,500	25.2	31.0	33.3	40.7	47.4	50.2	54.0	60.7	67.7	68.7	71.5	
3,000	31.0	35.8	38.0	45.9	54.5	58.4	63.4	72.2	80.6			
3,500	37.5	42.9	45.4	54.5	64.4	68.9	74.9	85.7				

**Current consumption (for 24V applications the following must be halved)**

rpm \ °F	-20	-13	-10	0	10	14	20	30	40	41	45	50
2,000	1.59	1.96	2.10	2.57	3.01	3.19	3.44	3.89	4.37	4.45	4.64	4.93
2,500	2.10	2.58	2.77	3.38	3.95	4.18	4.49	5.05	5.63	5.73	5.95	
3,000	2.61	3.01	3.19	3.86	4.58	4.89	5.32	6.06	6.76			
3,500	3.14	3.58	3.79	4.55	5.38	5.74	6.25	7.15				

**COP (ASHRAE LBP)**

rpm \ °F	-20	-13	-10	0	10	14	20	30	40	41	45	50
2,000	3.88	4.30	4.48	5.16	5.93	6.24	6.80	7.74	8.73	8.82	9.23	9.73
2,500	3.75	4.09	4.26	4.89	5.64	5.93	6.50	7.46	8.47	8.53	9.00	
3,000	3.36	3.86	4.08	4.83	5.63	5.90	6.48	7.41	8.44			
3,500	3.16	3.56	3.77	4.56	5.42	5.73	6.31	7.23				

**COP (EN 12900 Household/CECOMAF)**

rpm \ °F	-20	-13	-10	0	10	14	20	30	40	41	45	50
2,000	0.92	1.02	1.06	1.22	1.40	1.48	1.60	1.82	2.06	2.08	2.17	2.29
2,500	0.89	0.97	1.01	1.15	1.33	1.41	1.53	1.76	2.00	2.02	2.12	
3,000	0.79	0.90	0.96	1.13	1.32	1.40	1.52	1.74	1.98			
3,500	0.75	0.84	0.89	1.07	1.28	1.36	1.49	1.70				

**Operational errors shown by LED (optional)**

Number of flashes	Error type
5	<b>Thermal cut-out of electronic unit</b> (If the refrigeration system has been too heavily loaded, or if the ambient temperature is high, the electronic unit will run too hot).
4	<b>Minimum motor speed error</b> (If the refrigeration system is too heavily loaded, the motor cannot maintain minimum speed at approximately 1,850 rpm).
3	<b>Motor start error</b> (The rotor is blocked or the differential pressure in the refrigeration system is too high (>5 bar)).
2	<b>Fan over-current cut-out</b> (The fan loads the electronic unit with more than 1A <sub>peak</sub> ).
1	<b>Battery protection cut-out</b> (The voltage is outside the cut-out setting).


**Wire Dimensions DC**

Size AWG	Cross section [mm <sup>2</sup> ]	Max. length* 12V operation		Max. length* 24V operation	
		[ft.]	[m]	[ft.]	[m]
12	2.5	8	2.5	16	5
12	4	13	4	26	8
10	6	20	6	39	12
8	10	33	10	66	20

\*Length between battery and an electronic unit

**Wire dimensions AC**

Cross section min. AWG 18 or 0.75 mm<sup>2</sup>

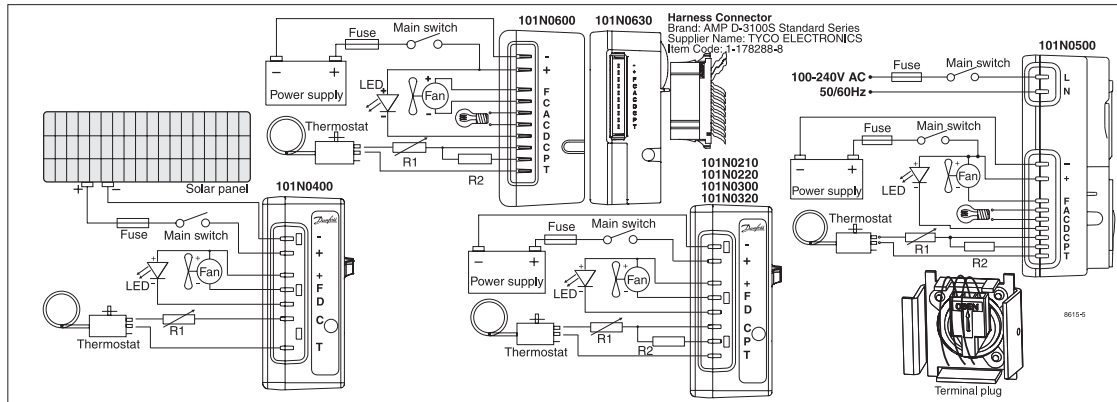
**Compressor speed**

Electronit unit Code number	Resistor (R1) [Ω] <i>calculated values</i>	Motor speed [rpm]	Control circuit current [mA]
101N0210	0	2,000	5
101N0220	277	2,500	4
101N0500	692	3,000	3
101N0600	1523	3,500	2
101N0300	0	AEO	6
101N0320	173	2,000	5
101N0400	450	2,500	4
with AEO	865	3,000	3
	1696	3,500	2

In AEO (Adaptive Energy Optimizing) speed mode the BD compressor will always adapt its speed to the actual cooling demand.

Test conditions	ASHRAE	EN 12900/CECOMAF
Condensing temperature	130°F	131°F
Ambient temperature	90°F	90°F
Suction gas temperature	90°F	90°F
Liquid temperature	90°F	no subcooling

Accessories for	BD35F	Code number
Bolt joint for one compressor	Ø: 5/8 in.	118-1917
Bolt joint in quantities	Ø: 5/8 in.	118-1918
Snap-on in quantities	Ø: 5/8 in.	118-1919
Remote kit (without cable)		105N9210
AC line cord (UL approved/VDE approved)		105N9520/30
DC usage: Std. automobile fuse 12V: 15A / 24V: 7.5A Main switch: rated to min. 20A		Not deliverable from Danfoss
AC usage: Fuse 100-240V: 4A / Main switch: min. 6A		