



GENERAL INSTRUCTIONS

1. Install switch in a 1 1/8" X 2 3/8" hole in wood panel.
2. Wire as shown below. The hot line from the battery should go to the fuse.
3. Crimp 3 connectors provided onto ends of wires as shown below. Strip wire ends for 1/4" prior to crimping on connector. Refer to your pump instructions to determine proper wire size. If your installation is over 20' from the battery source, increase the wire size by one gauge (i.e.-16ga. to 14ga. and 14ga. to 12ga.) Push connectors onto terminals as shown.
4. For fuse removal – push and turn to release.
5. Failure to fuse your system will void the warranty on any rule® pump.

Computerized - 3 wire

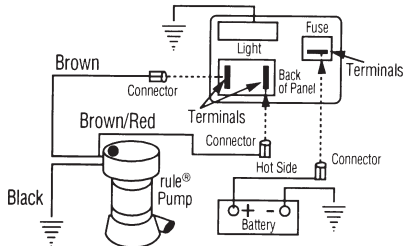

Manual - 2 wire

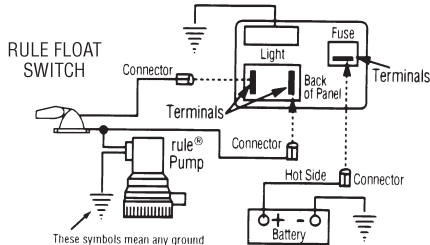

rule industries

xylem
Let's Solve Water